

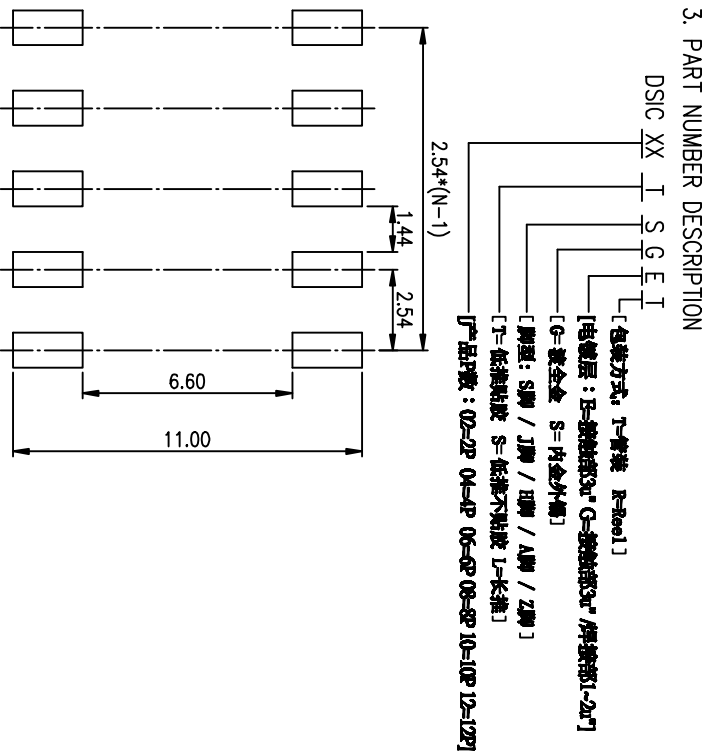
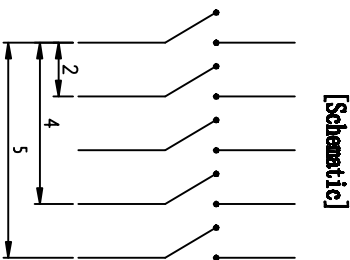

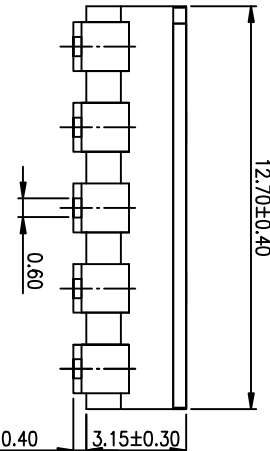
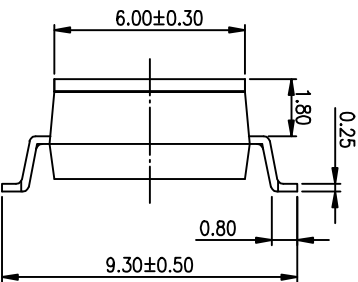


PRODUCT NO.	DS1C05SSGCT
RoHS compliant	

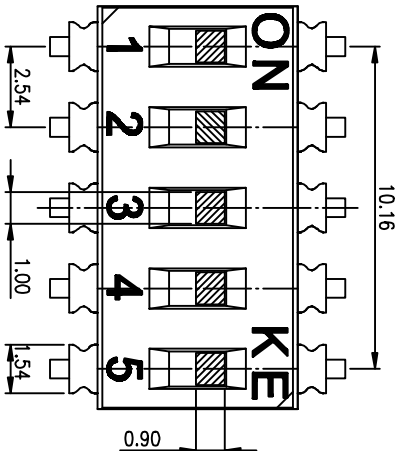

**RECOMMENDED P.C.B. LAYOUT (TOP VIEW)**



(Construction)

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED			INSPECTION	
LINER	ANGLES	COPY	PROJECTION	
0 ± 0.25	0 ± 2'			
.00 ± 0.15	.0 ± 1'			
.000 ± 0.10	.00 ± 0.5'			
DESIGN		kathy	2012/04/12	
DRAWING				
CHECK				
APPRO.				

**RE** 瑞普特電子股份有限公司  
Dongguan Kingtek Industrial Co., Ltd.

FILE NO.	DS1C05SSGCT-A
SIZE	UNIT SCALE SHEET REV.
A4	mm 2 : 1 10F 1 A

- NOTES :
- 1> Specification:
    - 1> Operating force: 1000gf Max
    - 2> Operating Temperature: -40° to+85°
    - 3> Storage Temperature: -40° to+85°
    - 4> Mechanical Life: 3000cycles minimum
    - 5> Electrical Life: 2000cycles minimum
  2. PLATING:
    - GOLD FLASH 1u"(min.) SOLDER TAIL,
    - 3u" GOLD PLATING ON THE CONTACT AREA,
    - WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

DS1C XX I S G E T  
 [包裝方式: T=卷裝 R=盒裝]  
 [電鍍層: B=鍍鍍銀3u" G=鍍鍍銀3u" / 鍍鍍銀1-2u"]  
 [G=鍍金 S=內鍍外鍍]  
 [腳型: S脚 / J脚 / 環脚 / A脚 / Z脚]  
 [T=低推力度 S=低推不推度 L=長推]  
 [產品編號: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]