



- NOTES :
- Specification:
    - Operating force: 1000gf Max
    - Operating Temperature: -40° to +85°
    - Storage Temperature: -40° to +85°
    - Mechanical Life: 3000cycles minimum
    - Electrical Life: 2000cycles 25mA 24VDC
  - PLATING:
    - GOLD FLASH 1u"(min.) SOLDER TAIL,
    - 3u" GOLD PLATING ON THE CONTACT AREA,
    - WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

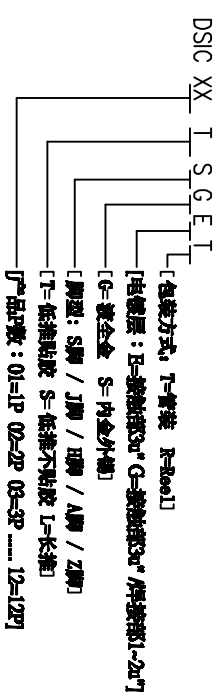

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	COPY
0 ± 0.25	0. ± 2°		
.00 ± 0.15	.0 ± 1°		
.000 ± 0.10	.00 ± 0.5°		
DESIGN kathy		2012/04/12	
DRAWING			
CHECK			
APPRO.			

瑞奇精微电子有限公司 Dongguan Kingtek Industrial Co., Ltd.			
TITLE			
BY DISC SERIES PITCH 2.54mm			
PRODUCT FAMILY DISC SERIES			
FILE NO.	DISC10LHGET-A	SIZE	UNIT
A4	mm	2 : 1	10F-1