


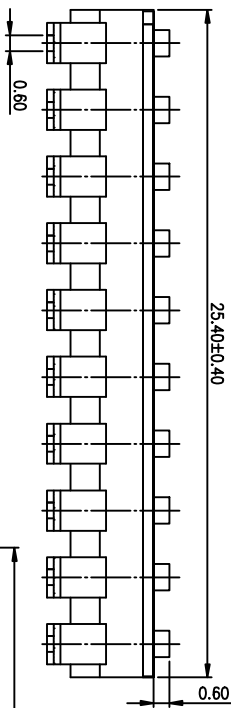

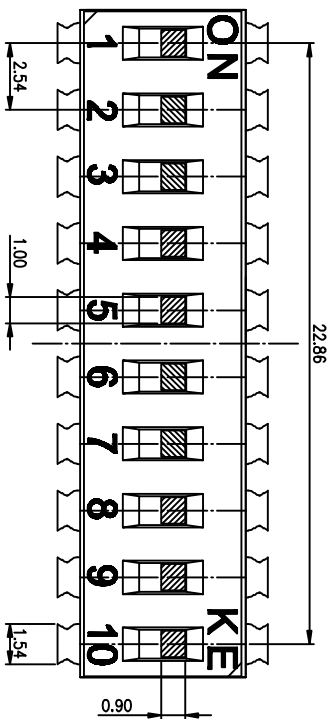
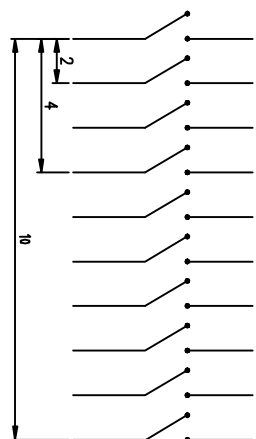


PRODUCT NO.	DSIC10LJGET
RoHS compliant	

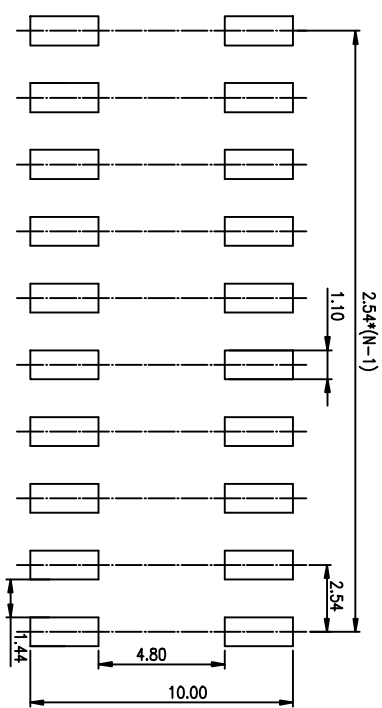

(Construction)



- NOTES :
- 1> Specification:
    - 1> Operating force: 1000gf Max
    - 2> Operating Temperature: -40° to +85°
    - 3> Storage Temperature: -40° to +85°
    - 4> Mechanical Life: 3000cycles minimum
    - 5> Electrical Life: 2000cycles 25mA 24VDC
  2. PLATING:
    - GOLD FLASH 1u"(min.) SOLDER TAIL,
    - 3u" GOLD PLATING ON THE CONTACT AREA,
    - WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

- DSIC XX T S G E T
- [包裝方式: T=管裝 R=Roll]
  - [導體層: B=鍍銀3u" G=鍍鎳3u" P=鍍銅1-2u"]
  - [G=鍍金 S=內金外鍍]
  - [腳型: S脚 / J脚 / 環脚 / A脚 / Z脚]
  - [T=低插裝 S=低插不裝 L=長插]
  - [产品尺寸: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	COPY
0 ± 0.25	0. ± 2°		
.00 ± 0.15	.0 ± 1°		
.000± 0.10	.00± 0.5°		
DESIGN	kathy	2012/04/12	
DRAWING			
CHECK			
APPRO.			
TITLE		BY DSIC SERIES PITCH 2.54mm	
PRODUCT FAMILY DSIC SERIES		PRAT NO. DSIC10LJGET	
FILE NO.	DSIC10LJGET-A	SIZE	UNIT
A4	mm	SCALE	SHEET
	2 : 1	1 OF 1	REV.
			A

**KE** 德富精工電子股份有限公司  
Dongguan Kingtek Industrial Co., Ltd.