
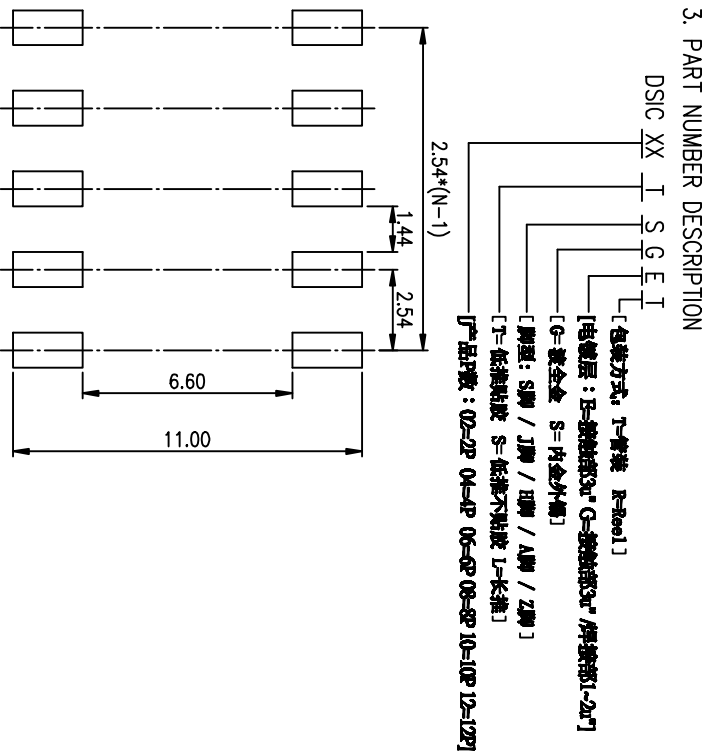
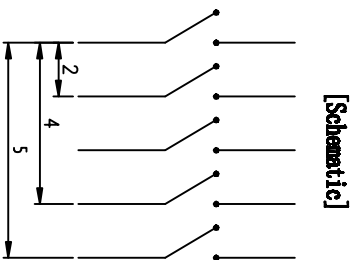
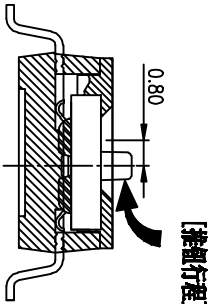
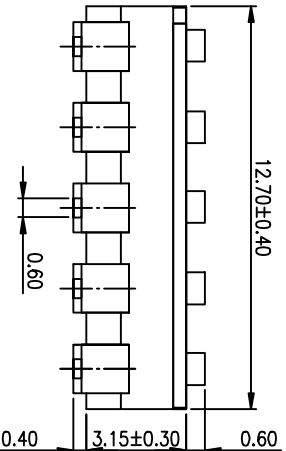
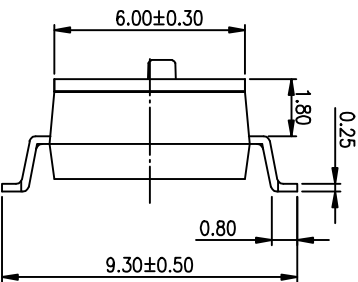


PRODUCT NO.	1
DISCO1SGE1	RoHS compliant

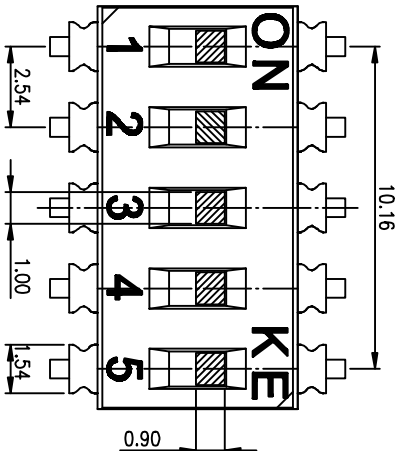

NOTES :

1>.Specification:

- 1>.Operating force:1000gf Max
- 2>.Operating Temperature: -40° to+85°
- 3>.Storage Temperature: -40° to+85°
- 4>.Mechanical Life:3000cycles minimum
- 5>.Electrical Life:2000cycles minimum

2. PLATING:


GOLD FLASH 1u"(min.) SOLDER TAIL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATINGOVERALL.

3. PART NUMBER DESCRIPTION

DISC XX I S G E T

- [包装方式: T=管装 R=盒装]
- [电镀层: B=镀锡3u" G=镀镍3u" / 厚镀层: 2u"]
- [G=鍍金 S=內金外鍍]
- [脚型: S脚 / J脚 / 環脚 / A脚 / Z脚]
- [T=低推力度 S=低推不推度 L=长推]
- [产品规格: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

(Construction)



Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED			INSPECTION
LINER	ANGLES	COPY	COPY
0 ± 0.25	0 ± 2'	PROJECTION	
.00 ± 0.15	.0 ± 1'		
.000 ± 0.10	.00 ± 0.5'	DESIGN	2012/04/12
DRAWING			PRAT NO.
CHECK			DISCO1SGE1
APPRO.			FILE NO.
			DISCO1SGE1-A
			SIZE
			UNIT
			SCALE
			SHEET
			REV.
			A4
			Z : 1
			TOT: 1
			A

RE 德普特微电子有限公司
Dongguan Kingtek Industrial Co., Ltd.

TITLE
BY DISC SERIES PITCH 2.54mm

PRODUCT FAMILY DISC SERIES

PRAT NO. DISCO1SGE1

FILE NO. DISCO1SGE1-A
SIZE UNIT SCALE SHEET REV.
A4 mm 2 : 1 TOT: 1 A